

Linear Graphic and Literature post

A linear graphic and literature post, great for demonstration and exhibition environments, an ideal solution for displaying information



Graphics are not supplied

features & benefits


- Portable and easy to assemble
- Anodised aluminium construction
- 50mm round modular post system as standard
- 450mm dia steel dome bases supplied as standard
- Supplied with 3 adjustable A4 leaflet holders
- Overall assembled size
2060mm (h) x 523mm (w) x 450mm (d) approx



450mm dia Steel dome
extra cost option

(weight 7.5kg approx)

Recommended
carry bag: LPB



Pocket depth:
20mm approx
(weight 1.5kg approx)

Vertical position and
angle of the leaflet
holder can be adjusted

hardware & graphic specifications

Hardware dimensions (mm):

2060mm (h) x 523mm (w) x 450mm (d)
approx

Recommended graphic substrates:
5mm thick foam board (supplied separately)

Recommended graphic size (mm)
Please refer to Graphic template

Recommended accessories

AB293 and **AB910** - carry bags

LN900 - base weight

Assembly Instructions

Linear Graphic and Literature post includes:

450mm dia Steel dome
base & M10 bolt
(weight 6kg approx)

Leaflet holder kit x 3
(weight 4.5kg approx)

Male post x 1
(weight 1kg approx)

Female post x 1
(weight 1kg approx)

Allen key set

PVC clear
washer x 1

Multi-angle Fixing x 3

Brass Insert (rail
Fixing) x 3




Attach leaflet holder to the post.
Slide flat bar of holder into the
channel of linear post.

**Ensure thumb fastener threads
are flush to the flat bar.**

Position & angle holder to suit,
tighten both thumb fasteners to
secure the holder to the post.
Repeat step for remaining holders.



To attach the stand off's, place
the rail fixing into the channel on
the linear post and twist the
bottom section off the stand off
until securely in place. Place the
graphic into place within the
stand off and tighten grub screw
until tightly in place.

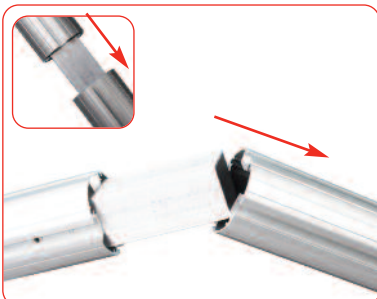

Align and slide female post over
male post.



Attach base to male post using M10
bolt and allen key. Ensure clear
washer is between base & post